


TYPE NES 2

Equivalent to John Crane 2

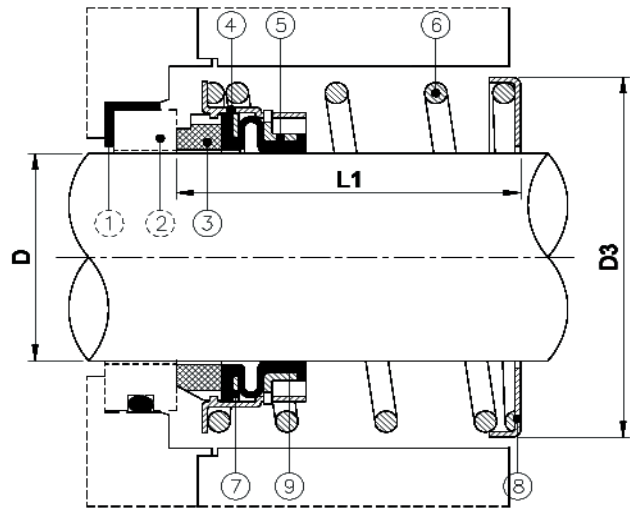

- 1 O-Ring Or Cup Rubber
- 2 Stationary Face
- 3 Rotary Face
- 4 Retainer
- 5 Driver Band
- 6 Spring
- 7 Disc
- 8 Spring Holder
- 9 Elastomer Bellows

Features:

A single spring elastomer bellow seal. It is widely used in pumps and refrigeration compressors.

Operating Conditions:

Pressure: Up to 10kg/cm² (140 PSI)

Temperature: -10°C ~180°C

Speed: Up to 13m/s

Materials:

Rotary Face: Carbon, SiC, SSiC, TC.

Stationary Face: Ceramic, SiC, SSiC, TC.

Elastomer: NBR, EPDM, Viton ®.

Spring: 304SS, 316SS

All Metal Parts: 304SS, 316SS.

All trademarks are the property of their respective owners.

Seat Compatibility:

Standard: J.

Alternative: U, T.

D	D3	L1
15	35	25
16	35	25
18	40	25
20	41	25
22	43	25
24	47	25
25	47	25
28	56	33
30	59	33
32	59	33
35	63	33
38	67	33
40	71	33
42	74	41
43	74	41
45	74	41
48	77	41
50	81	41
53	84	41
55	88	41
58	88	41
60	91	41
65	100	49
70	103	49
73	108	52
75	111	52
80	121	56
85	125	56
95	134	59
100	142	62