


# TYPE NES-22

Equivalent to Eagle H1

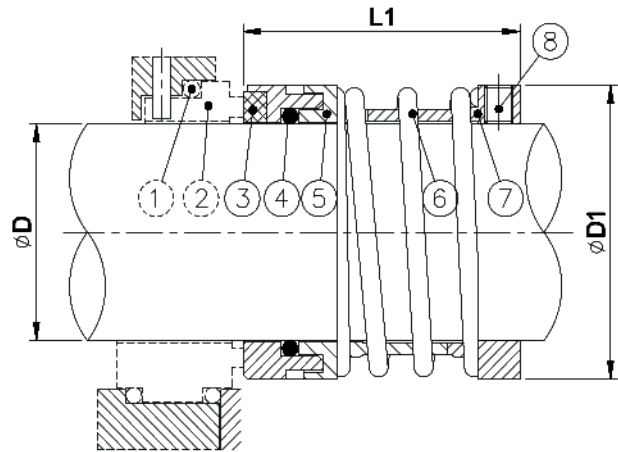

- 1 O-Ring
- 2 Stationary Face
- 3 Rotary Face
- 4 O-Ring
- 5 Retainer
- 6 Spring
- 7 Drive Collar
- 8 Drive Screw

D	D1	L1
20	34	46
22	36	46
24	38	48
25	39	48
28	42	50
30	44	50
32	46	50
33	47	50
35	49	54
38	54	57
40	56	59
42	58	59
43	59	59
45	61	59
48	64	59
50	66	62
52	68	63
53	69	63
55	71	63
58	76	66
60	78	66
62	80	66
63	81	66
65	84	70
68	87	70
70	90	71
75	95	75
80	100	75
85	107	80
90	112	80
95	119	85
100	124	85

### Features:

Widely used in water pumps, sewage pumps, submerged pumps and chemical pumps.

### Operating Conditions:

Pressure: Up to 12kg/cm<sup>2</sup> (170 PSI)  
 Temperature: -20°C ~230°C  
 Speed: Up to 15m/s

### Materials:

Rotary Face: SS, SiC, SSiC, TC.  
 Stationary Face: Carbon, SiC, SSiC, TC.  
 Elastomer: NBR, EPDM, Viton®.  
 Spring: 304SS, 316SS  
 All Metal Parts: 304SS, 316SS.

All trademarks are the property of their respective owners.

### Seat Compatibility:

Standard: X.  
 Alternative: Y.