


TYPE NES-23

Equivalent to Eagle L1

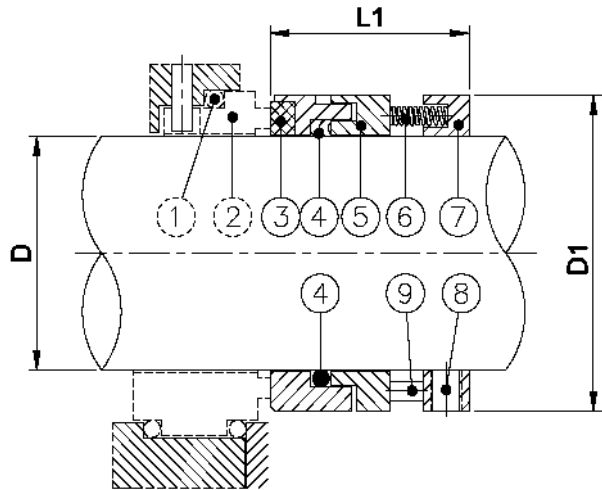

- 1 O-Ring
- 2 Stationary Face
- 3 Rotary Face
- 4 O-Ring Or V-Ring
- 5 Retainer
- 6 Spring
- 7 Drive Collar
- 8 Drive Screw
- 9 Cap Screw

D	D1	L1
20	34	35
22	36	35
24	38	35
25	39	35
28	42	35
30	44	35
32	46	35
33	47	35
35	49	35
38	54	38
40	56	38
42	58	38
43	59	38
45	61	38
48	64	38
50	66	39
52	68	40
53	69	40
55	71	40
58	76	41
60	78	41
62	80	41
63	81	41
65	83	41
68	86	41
70	90	42
75	95	42
80	100	42
85	105	43
90	110	45
95	115	45
100	120	45

Features:

Widely used in water pumps, sewage pumps, submerged pumps and chemical pumps.

Operating Conditions:

Pressure: Up to 12kg/cm² (170 PSI)
 Temperature: -20°C ~230°C
 Speed: Up to 15m/s

Materials:

Rotary Face: SiC, SSiC, TC.
 Stationary Face: Carbon, SiC, SSiC, TC.
 Elastomer: NBR, EPDM, Viton®.
 Spring: 304SS, 316SS
 All Metal Parts: 304SS, 316SS.

All trademarks are the property of their respective owners.

Seat Compatibility:

Standard: X.
 Alternative: Y.