


TYPE NES 5

Equivalent to John Crane 502

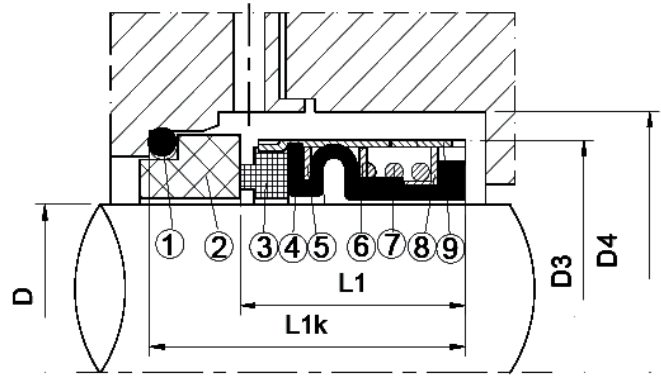

- 1 O-Ring
- 2 Stationary Face
- 3 Rotary Face
- 4 Elastomer Bellows
- 5 Washer
- 6 Washer
- 7 Spring
- 8 Spring Holder
- 9 Retainer

Features:

Compact designed elastomer bellow seal, completely assembled for easy installation.

Operating Conditions:

Pressure: Up to 20kg/cm² (285 PSI)
 Temperature: -20°C ~180°C
 Speed: Up to 15m/s

Materials:

Rotary Face: Carbon, SiC, SSiC, TC. Stationary Face: Ceramic, SiC, SSiC, TC. Elastomer: NBR, EPDM, Viton®.
 Spring: 304SS, 316SS
 All Metal Parts: 304SS, 316SS.

All trademarks are the property of their respective owners.

Seat Compatibility:

Standard: G.
 Alternative: F, A1, A2.

D	D3	D4	L1	L1k
14	24	26	23.0	35.0
16	26	28	23.0	35.0
18	32	34	24.0	37.5
20	34	36	24.0	37.5
22	36	38	24.0	37.5
24	38	40	26.7	40.0
25	39	41	27.0	40.0
28	42	44	30.0	42.5
30	44	46	30.5	42.5
32	46	48	30.5	42.5
33	47	49	30.5	42.5
35	49	51	30.5	42.5
38	54	58	32.0	45.0
40	56	60	32.0	45.0
43	59	63	32.0	45.0
45	61	65	32.0	45.0
48	64	68	32.0	45.0
50	66	70	34.0	47.5
53	69	73	34.0	47.5
55	71	75	34.0	47.5
58	78	83	39.0	52.5
60	80	85	39.0	52.5
63	83	88	39.0	52.5
65	85	90	39.0	52.5
68	88	93	39.0	52.5
70	89	95	45.5	60.0
75	96	104	45.5	60.0
80	104	109	45.0	60.0
85	108	114	45.0	60.0
90	114	119	50.0	65.0
95	118	124	50.0	65.0
100	124	129	50.0	65.0