


TYPE NES-8

Equivalent to Vulcan 8

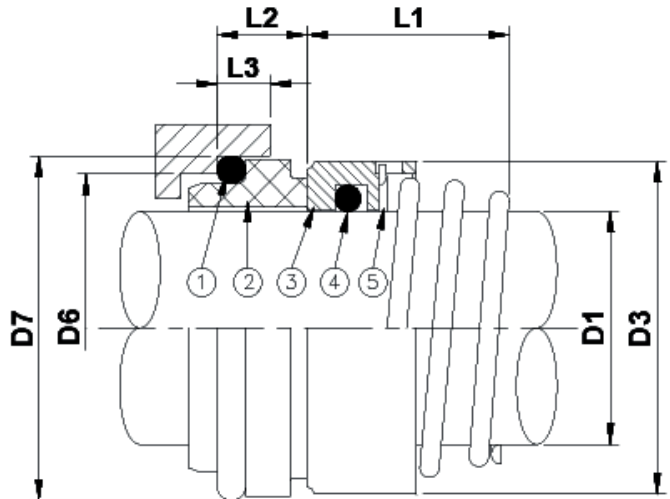

- 1 O-Ring
- 2 Stationary Face
- 3 Rotary Face
- 4 O-Ring
- 5 Spring

Features:

A simple, reliable single spring seal. Widely used in water pumps, sewage pumps, submerged pumps and chemical pumps

Operating Conditions:

Pressure: Up to 10kg/cm² (140 PSI)
 Temperature: -20°C ~200°C
 Speed: Up to 15m/s

Material:

Rotary Face: SS, Carbon, SiC, TC.
 Stationary Face: Carbon, Ceramic, SiC, TC.
 O-Ring: NBR, EPDM, Viton®
 Spring: 304SS, 316SS

All trademarks are the property of their respective owners.

Seat Compatibility:

Standard:
 Alternatives:

D1	D3	D6	D7	L1	L2	L3
10	19	17	21	15.5	7.1	5.0
12	21	19	23	15.5	7.6	5.0
14	23	21	25	15.5	7.6	5.0
15	24	--	--	15.5	8.6	5.0
16	26	23	27	17.5	9.0	6.5
18	29	27	33	18.5	10.0	6.5
19	31	--	--	20.0	9.0	6.5
20	31	29	35	20.0	9.5	6.5
22	33	31	37	21.5	9.5	6.5
24	35	33	39	23.0	9.5	6.5
25	36	34	40	24.5	9.5	6.5
26	37	--	--	24.5	10.0	6.5
28	40	37	43	24.5	11.0	6.5
30	43	39	45	24.5	11.0	6.5
32	46	42	48	28.0	11.0	6.5
35	49	44	50	28.0	11.5	6.5
38	53	49	56	31.0	11.5	6.5
40	56	51	58	34.0	11.5	6.5
42	59	--	--	35.0	14.3	8.0
43	59	54	61	35.0	14.3	8.0
45	61	56	63	36.5	14.3	8.0
48	64	59	66	42.0	14.3	8.0
50	66	62	70	43.0	14.3	8.0
55	71	67	75	47.0	15.3	8.0
58	76	70	78	50.0	15.3	8.0
60	78	72	80	51.0	15.3	8.0
65	84	77	85	52.0	15.3	8.0
68	88	81	90	53.0	16.0	8.0
70	90	83	92	54.0	15.3	8.0
75	98	88	97	55.0	15.3	8.0
80	100	95	105	58.0	16.3	8.0