


TYPE NES-9B

Equivalent to Burgmann H7N

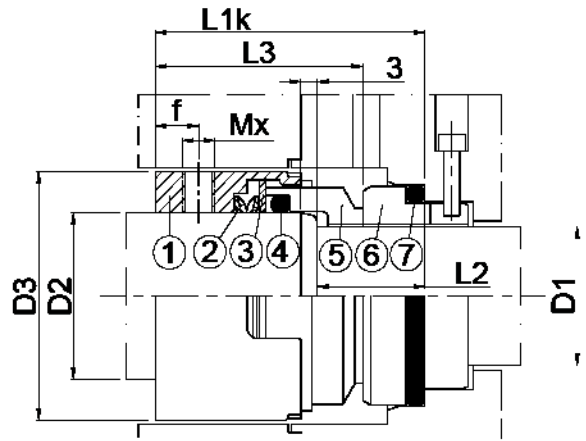

- 1 Retainer
- 2 Wave Spring
- 3 Disc
- 4 O-ring
- 5 Rotary Face
- 6 Stationary Face
- 7 O-Ring

Features:

A simple, reliable balanced single spring seal. Widely used in water pumps, sewage pumps, submerged pumps and chemical pumps.

Operating Conditions:

Pressure: Up to 25kg/cm² (355 PSI)
 Temperature: -20°C ~200°C
 Speed: Up to 20m/s

Material:

Rotary Face: Carbon, SiC, SSiC, TC.
 Stationary Face: Ceramic, SiC, SSiC, TC.
 O-Ring: NBR, EPDM, Viton®

Chemrez® and Kalrez® are available on request.

All trademarks are the property of their respective owners.

Seat Compatibility:

Standard: A.
 Alternatives:

D1	D2	D3	L1K	L2	L3	Mx
14	18	33	42.5	18	32.5	M5
16	20	35	42.5	18	32.5	M5
18	22	37	45.0	20	33.5	M5
20	24	39	45.0	20	33.5	M5
22	26	41	45.0	20	33.5	M5
24	28	43	47.5	20	36.0	M6
25	30	45	47.5	20	36.0	M6
28	33	48	50.0	20	38.5	M6
30	35	50	50.0	20	38.5	M6
32	38	55	50.0	20	38.5	M6
33	38	55	50.0	20	38.5	M6
35	40	57	50.0	20	38.5	M6
38	43	60	52.5	23	38.5	M6
40	45	62	52.5	23	38.5	M6
43	48	65	52.5	23	38.5	M6
45	50	67	52.5	23	38.5	M6
48	53	70	52.5	23	38.5	M6
50	55	72	57.5	25	42.5	M6
53	58	79	57.5	25	42.5	M8
55	60	81	57.5	25	42.5	M8
58	63	84	62.5	25	47.5	M8
60	65	86	62.5	25	47.5	M8
63	68	89	62.5	25	47.5	M8
65	70	91	62.5	25	47.5	M8
70	75	99	70.0	28	52.0	M8
75	80	104	70.0	28	52.0	M8
80	85	109	70.0	28	51.8	M8
85	90	114	75.0	28	56.8	M8
90	95	119	75.0	28	56.8	M8
95	100	124	75.0	28	57.8	M8
100	105	129	75.0	28	57.8	M8