


TYPE A

Equivalent to Burgmann G9

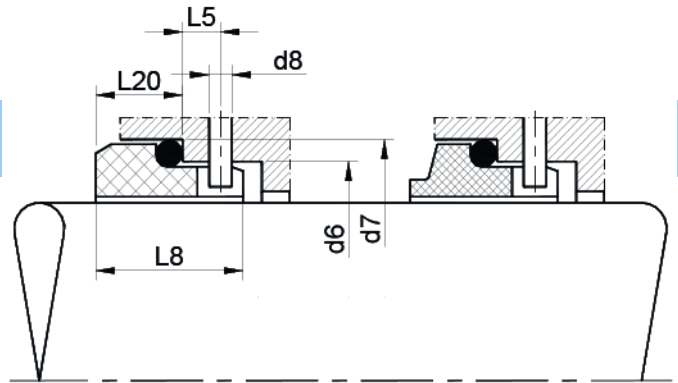

Shaft	d6	d7	d8	L5	L8	L20
10	17.0	21.0	3	5	17.5	10.0
12	19.0	23.0	3	5	17.5	10.0
14	21.0	25.0	3	5	17.5	10.0
16	23.0	27.0	3	5	17.5	10.0
18	27.0	33.0	3	5	19.5	11.5
20	29.0	35.0	3	5	19.5	11.5
22	31.0	37.0	3	5	19.5	11.5
24	33.0	39.0	3	5	19.5	11.5
25	34.0	40.0	3	5	19.5	11.5
28	37.0	43.0	3	5	19.5	11.5
30	39.0	45.0	3	5	19.5	11.5
32	42.0	48.0	3	5	19.5	11.5
33	42.0	48.0	3	5	19.5	11.5
35	44.0	50.0	3	5	19.5	11.5
38	49.0	56.0	4	5	22.0	14.0
40	51.0	58.0	4	5	22.0	14.0
43	54.0	61.0	4	5	22.0	14.0
45	56.0	63.0	4	5	22.0	14.0
48	59.0	66.0	4	5	22.0	14.0
50	62.0	70.0	4	5	23.0	15.0
53	65.0	73.0	4	5	23.0	15.0
55	67.0	75.0	4	5	23.0	15.0
58	70.0	78.0	4	5	23.0	15.0
60	72.0	80.0	4	5	23.0	15.0
65	77.0	85.0	4	5	23.0	15.0
68	81.0	90.0	4	5	26.0	18.0
70	83.0	92.0	4	5	26.0	18.0
75	88.0	97.0	4	5	26.0	18.0
80	95.0	105.0	4	5	26.2	18.2
85	100.0	110.0	4	5	26.2	18.2
90	105.0	115.0	4	5	26.2	18.2
95	110.0	120.0	4	5	25.2	17.2
100	115.0	125.0	4	5	25.2	17.2

Shaft	d6	d7	d8	L5	L8	L20
105	122.2	134.3	5	5	30.0	20.0
110	128.2	140.3	5	5	30.0	20.0
115	136.2	148.3	5	5	30.0	20.0
120	138.2	150.3	5	5	30.0	20.0
125	142.2	154.3	5	5	30.0	20.0
130	146.2	158.3	5	5	30.0	20.0
135	152.2	164.3	5	5	30.0	20.0
140	156.2	168.3	5	5	30.0	20.0
145	161.2	173.3	5	5	30.0	20.0
150	168.2	180.3	5	5	32.0	22.0
155	173.2	185.3	5	5	34.0	24.0
160	178.2	190.3	5	5	34.0	24.0
165	183.2	195.3	5	5	34.0	24.0
170	188.2	200.3	5	5	34.0	24.0
175	193.2	205.3	5	5	34.0	24.0
180	207.5	219.5	5	5	38.0	28.0
185	212.5	224.3	5	5	38.0	28.0
190	217.5	229.3	5	5	38.0	28.0
195	222.5	234.3	5	5	38.0	28.0
200	227.5	239.3	5	5	38.0	28.0
205	232.5	244.6	5	5	40.0	30.0
210	237.5	249.6	5	5	40.0	30.0
215	242.5	254.6	5	5	40.0	30.0
220	247.5	259.6	5	5	40.0	30.0
225	252.5	264.6	5	5	40.0	30.0
230	261.5	273.6	5	5	40.0	30.0
235	266.5	278.6	5	5	40.0	30.0
240	271.5	283.6	5	5	40.0	30.0
245	276.5	288.6	5	5	40.0	30.0
250	281.5	293.6	5	5	40.0	30.0